


ITEM	PART NO	DESCRIPTION	MATERIAL	PLATING
①	SBT6.2SAA-B	BARREL	PBT	HARDENING Au
②	SBT6.2SAA-PA	PLUNGER A	BeCu	
③	SBT6.2SAA-PB	PLUNGER B	BeCu	HARDENING Au
④	SBT6.2SAA-S	SPRING	SWP	Au

MARK	DESCRIPTION OF REVISION	DATE	NAME

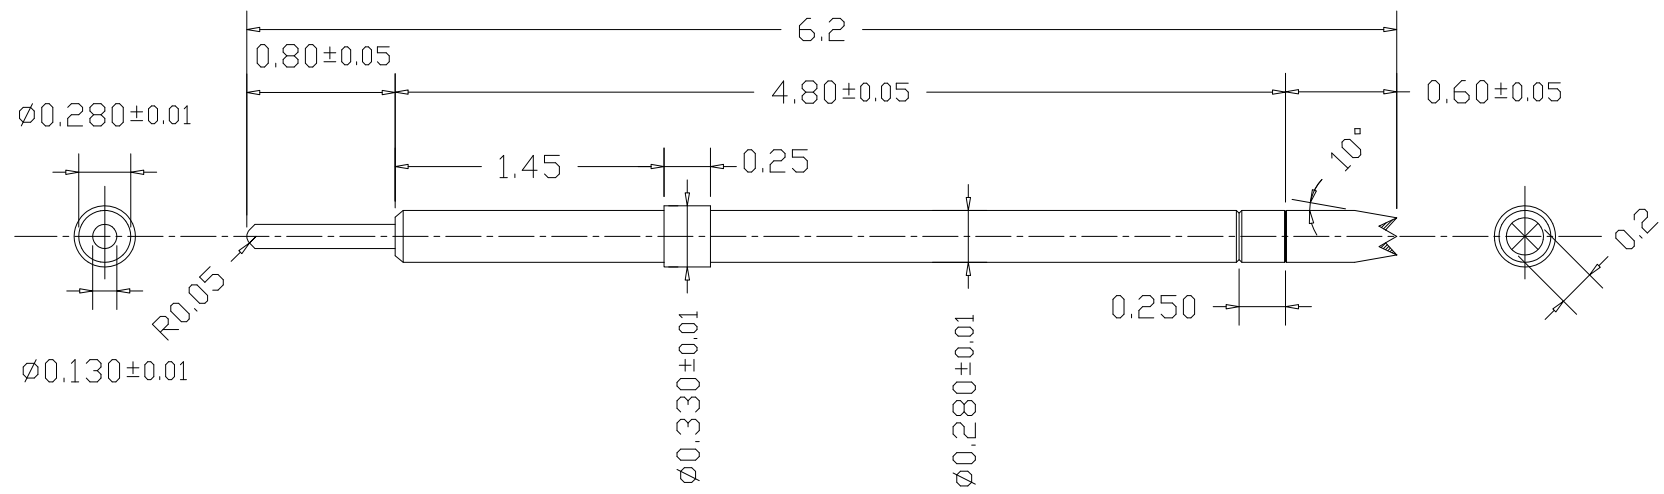

(Note)

- 1. Max Stroke 0.8 mm.
- 2. Recommended Contact force : 30gf at 0.6 mm. stroke

DESIGNED N.Yoshida	TITLE ASSEMBLY DRAWING		
CHECKED	SIZE A4	DWG NO. SBT6.2SAA	△
APPROVED S.Izumi	SCALE	Tesu Hanbai	
DRAWN 2005.12.06			